


With Us, You can



# HIGH GREEN SAFE

	32 m
	16,4 m
	250 kg
	Bi-energy Eco Hybrid
	Crawlers

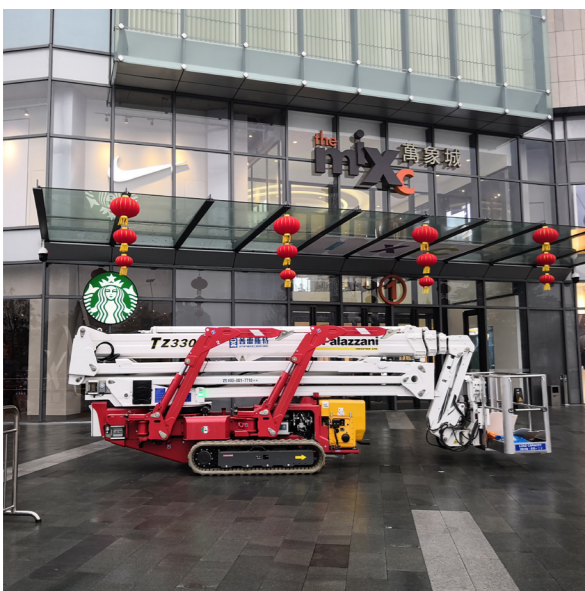


## SPIDER LIFT




### STANDARD EQUIPMENT

- Available power options: Bi-energy (Diesel + AC), Eco (AC+Battery), Hybrid (Diesel + AC + Battery)
- Emergency electropump
- Pistons hydraulic pump at variable displacement for fast and sharp movements and consumption savings. CAN-BUS distributor + CANBUS electronics
- "Return to home" function
- Hydraulic steering and transmission on rubber tracks whit hydraulically variable external width
- Independent outriggers rotating on 2 different positions
- Automatic set-up with self-levelling
- Turntable rotation at 660°
- Double steel made pantograph, telescopic boom + fixed jib
- Hydraulic and electric lines inside the boom
- Removable aluminium alloy aerial cage 180x70x110 cm, with hydraulic rotation 90° + 90°
- "Area manager" limiting device for safe working load 120 and 250 kg
- Radio control at the ground + electric control at the cage
- 230VAC electric plug on the cage
- PalSystem with touchscreen monitor for diagnostics and monitoring of operating parameters
- CE Mark homologation certificates, manuals, stickers and spares book in English language

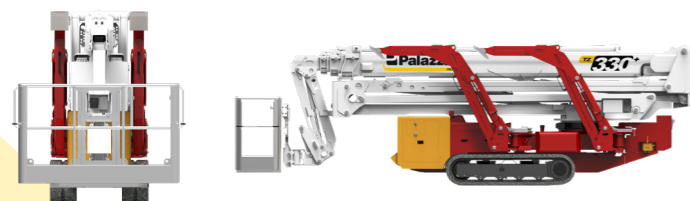

## OPTIONAL



### CAGES OF DIFFERENT SIZES

Different sizes aluminium cages for one man, or majored to accommodate more people or bulky equipment.




### CIRCUITO INTERFONICO

Di comunicazione a viva voce, fra la navicella aerea e la torretta al suolo.



### CASTORS UNDER THE CAGE

4 wheels mounted under the basket for easily moving it when dismounted.



### BASKET ANTI-COLLISION KIT

The laser sensors are positioned at the four corners of the basket and monitor the distance between the operator and any vertical obstacles. Ultrasonic sensors check the presence of any obstacles around the perimeter.



### NON-MARKING TRACKS

white rubber, ideal to operate indoor and/ or on delicate floors



### PEDAL TO THE CAGE

Safety pedal to operate the movements from the cage.




### TOUCHSCREEN MONITOR IN THE CAGE

Installed on the cage control panel, providing the operator with all detailed and salient information of the aerial working platform he needs during aerial work.



### ANEMOMETER

device for measuring the wind, with an acoustic warning of the wind max speed allowed for aerial working



### KIT PALCONNECT

Remote connection service with the aerial platform that allows the user to monitor the key parameters of use of the machine and intervene with some of them.




### PROTECTION OF PRUNERS

Covers kit in iron for delicate parts of the machine such as cylinders stems, valves and reels to protect against branches or other materials falling from above.



### CUSTOMIZED COLOURS

Possibility to customize the colours of the tracked lift with different RAL according to the client's corporate livery



### PADS FOR OUTRIGGERS

Different type of pads to distribute the load of the stabilizers on the ground and have greater stability of the machine.



### ADDITIONAL AIR/WATER PIPES

Extra-large diameter compressed air/water pipe to the basket.



### ELECTRIC GENERATOR

230VCA single-phase, powered by the diesel engine, connected to an electrical socket in the cage, for the use of electrical tools during aerial working



### LED LIGHT

One or more additional led headlights installed on the basket or on the boom.